



Mr. GoodTower®




EVAPCO E1900 counterflow fill was developed in EVAPCO's heat transfer laboratory and is the resulting combination of thousands of hours of thermal performance testing. EVAPAK's unique cross-fluted counterflow pattern is designed to induce highly turbulent mixing of air and water providing superior heat transfer in industrial and HVAC dirty water counterflow cooling tower applications.

- ✓ **CHEMICALLY BONDED**
- ✓ **EASY TO HANDLE BLOCKS**
- ✓ **RETROFIT KITS AVAILABLE**

EVAPCO E1900 fill blocks are manufactured from chemically bonded UV stable PVC material manufactured to CTI standard (CTI-136) the material is impervious to rot, fungi, bacteria, acids and alkalis that are commonly found in cooling tower re circulating water.

Bonded blocks are manufactured in lengths of up to 9' to minimize the complexity of fill support structures. Sheets are vacuum formed in EVAPCO facilities using EVAPCO designed vacuum forming machinery and moulds which are bonded in house to ensure each block is manufactured to strict internal quality control requirements. EVAPAK retrofit kits are available to suit competitors equipment providing a vast improvement in servicing, handling and maintenance when compared to some competitors OEM counterflow fill designs.

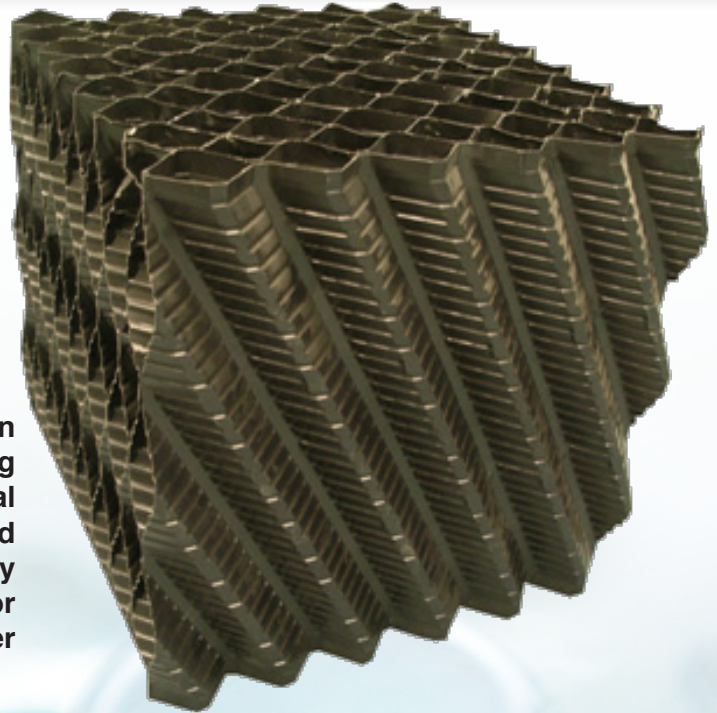

Maximum Block Width:	305 mm
Maximum Block Length:	2745 mm
Material:	PVC
Material Thickness:	0.26mm
Max. Operating Temp.	60°C
Sheet Spacing:	19mm



EVAPAK - E1900 COUNTERFLOW FILL